



AX SERIES POWER AMPLIFIER

AX2502MKII

OWNER'S MANUAL

TECHNICAL PARAMETER'S CHANGERS ARE NOT INFORMED.

PROFESSIONAL POWER AMPLIFIER

Our product is improving. When the external form and parameter changes, please refer to the material object. We will not inform you especially.

1
2
3
4
5
6
7
8
9
10




SPECIFICATIONS	
Model	AX2502MK
Stereo power	8Ω 400W
±0.1% THD	4Ω 630W
	2Ω 830W
Monophono Power	8Ω 1240W
±0.1% THD	4Ω 1440W
Signal to noise	105dB
Slew Rate	60V/μs
Coupling Factor	45dB
Cycle response	+/-0.1dB, 100Hz
THD	≤ 0.01% Rate
IMD	≤ 0.01% Rate
Output sensitivity	0.77V
LPF	20Hz
HPF	130Hz
Output impedance	10K/20K ohm
Input CMRR	
Cross talk	
LED indicator	Signal, Power
Power supply	-22V
Weight	
Dimensions(mm)	



PIN 1 Ground)2

PIN 1 Ground


PIN 1



Cold)

Cold)

Cold)

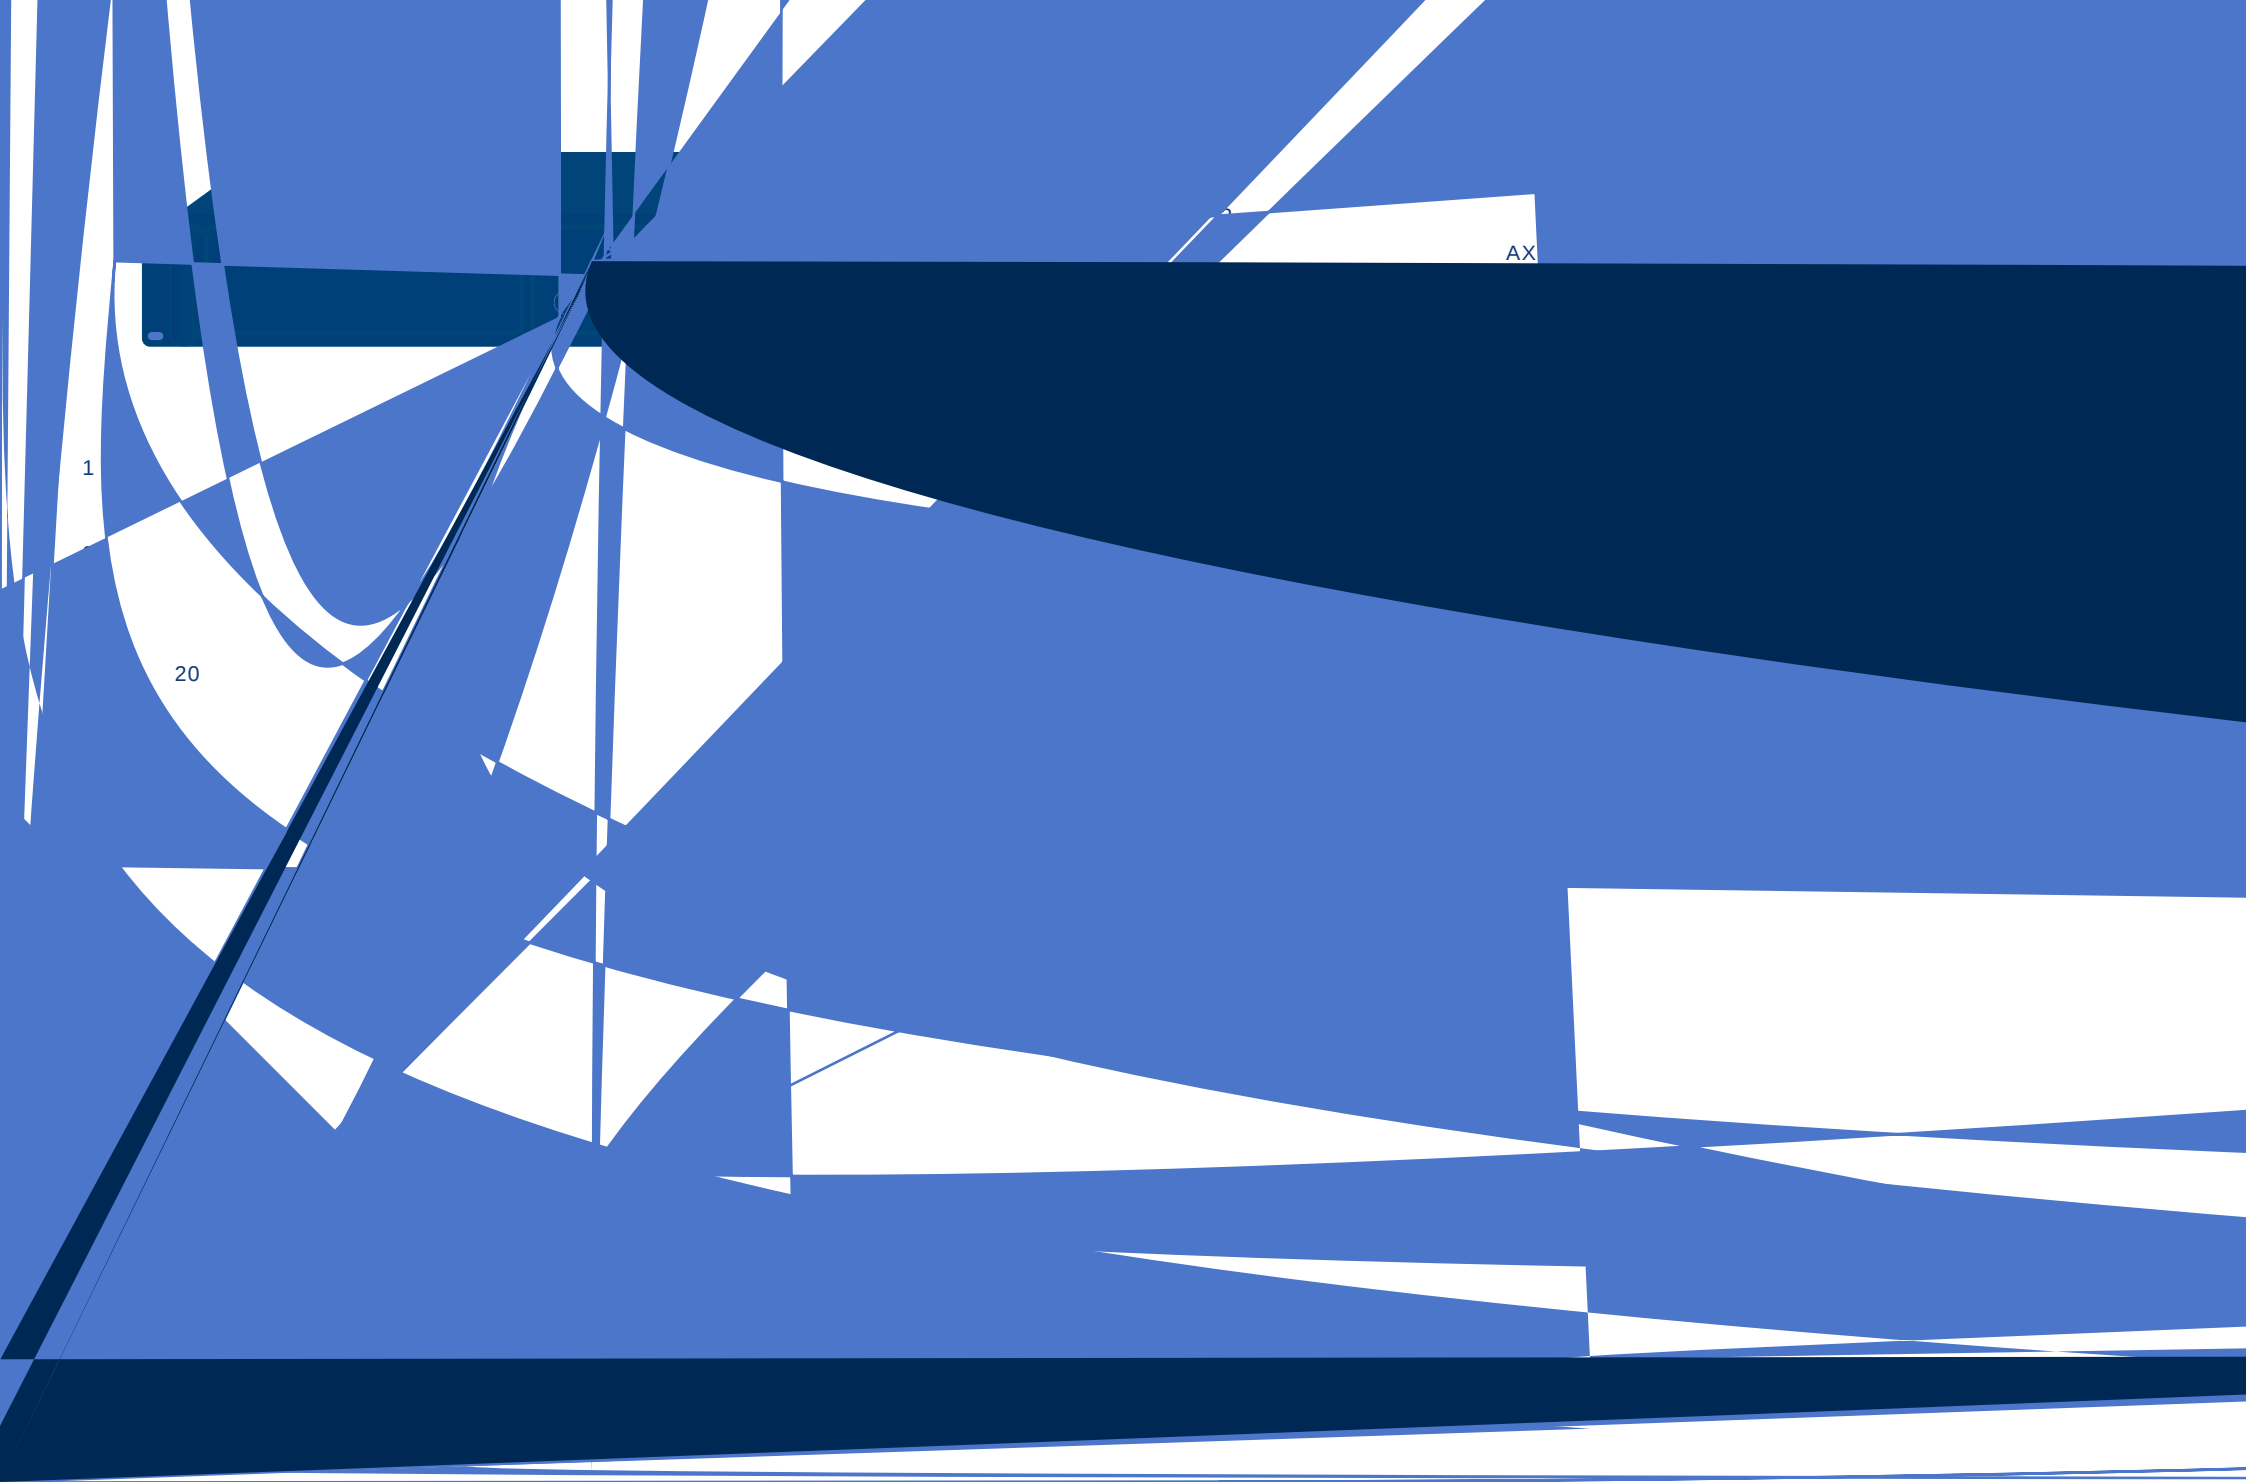

AX

1

20